


GJSJBV Duplex Armoured Flat Cable

Indoor

Cable structure:

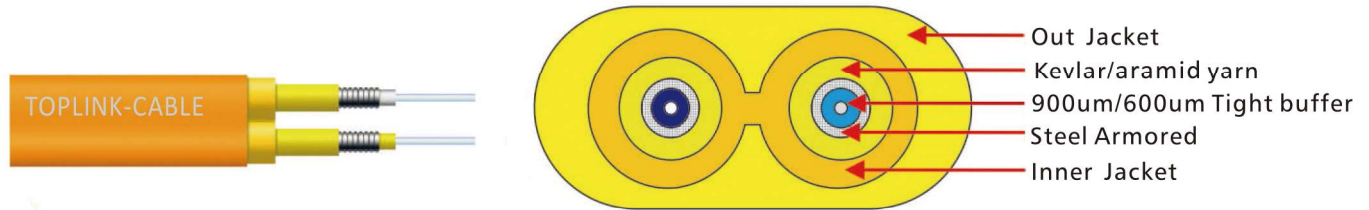

Description:

GJSJBV Duplex Armoured Flat Cable use 600um & 900um tight buffer fiber, steel tube protect, reinforcing steel-wire braiding (Kevlar/aramid yarn), flame-retardant jacket. High indentation strength, high tensile strength, gopher protected, small diameter, flexibility and easy bend.

Features:

- Two single-fiber as basic unit, flast twin configuration.
- Single-cable with 0.6mm or 0.9mm tight buffer .
- Kevlar yarn steel armored flexible or out sheath independent strength member.
- Excellent mechanical and enviromental performance .

Application:

- Adopted to indoor distribution.
- As pigtail of communication equipment .
- Suitable for communication equipment served .
- Can be installed conveniently and perated simply .

Technical parameters

Cable type	OD (mm)	Nominal Weight (kg/km)	Tensile Strength (N)		Crush Resistance (N/100MM)		Bending Radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Dynamic	Static
GJSJBV-2Xn	$(3.0 \pm 0.2) * (5.4 \pm 0.2)$	35.5	1000	300	2000	1000	20D	15D
GJSJBV-2Xn	$(3.8 \pm 0.2) * (7.0 \pm 0.2)$	38.5	1000	300	2000	1000	20D	15D
Storage/Working temperature (°C)			-20~+60					

Note: Xn is fiber optic model and D is the diameter of optical cable.

Packing and Reel Length

- ★.Standard wooden drum with protection.
- ★.Standard reel length:2/3 km/reel, other length is also available.