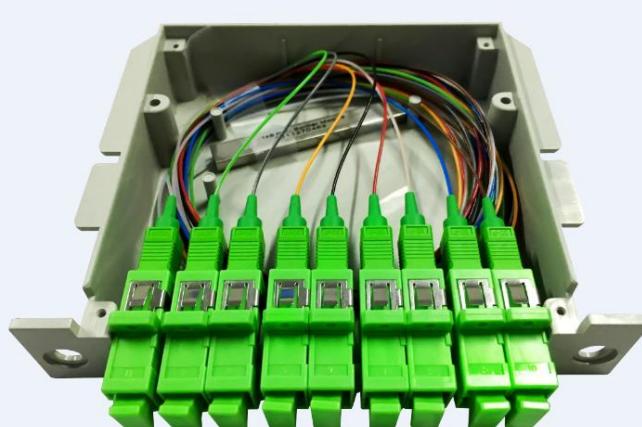


PLC Cardfile



Product description:

PLC Cardfile Made of ABS material , You can install the splitter, support a variety of spectra, 1X2,1X4, 1X8PLC splitter etc., according to various types of interfaces, select adapter.

Application:

- ★. Telecommunications subscriber loop
- ★. Fiber to the home (FTTH)
- ★. LAN/WAN
- ★. CATV
- ★. Other applications in fiber optic systems

Features:

- ☛ Standard size, light weight and reasonable structure.
- ☛ Compact design for space saving.
- ☛ Front mark on the plate is easy for identification and operation.
- ☛ Easy for management and operation.
- ☛ Low Insertion loss and Low PDL.
- ☛ Uniform power splitting.
- ☛ High reliability.

☛ Excellent environmental stability.

Mechanical and environmental characteristics:

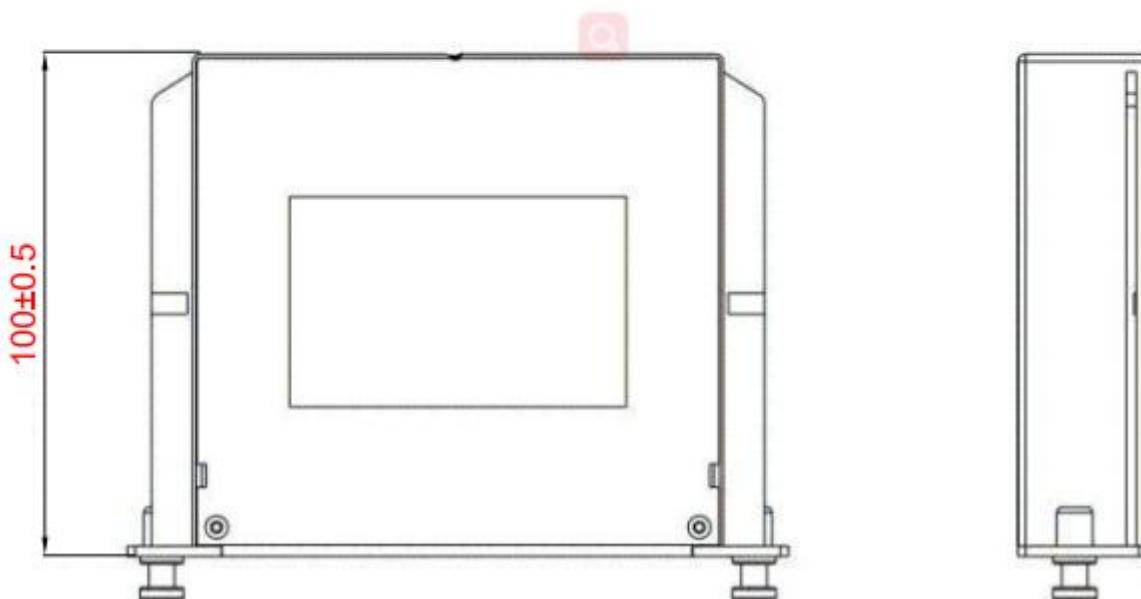
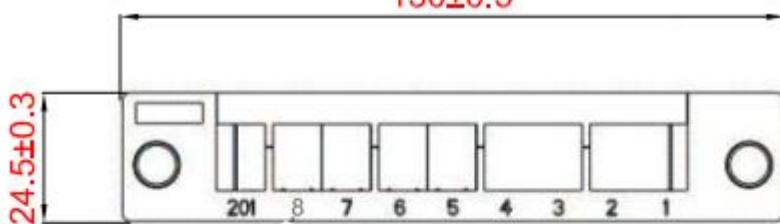
Projects	Parameter
Operating temperature	-25°C~+40°C
Storage temperature	-25°C~+55°C
Relative humidity	≤85%(+30°C)
Color	Grey

Dimension(LxWxH)

130mmx 100mmx25mm

Specifications and Models:

130±0.5

**1xN PLC Splitter((Room temperature, including connector loss)**

type		1×2	1×4	1×8	1×16	1×32	1×64	
Operating Wavelength (nm)		1260-1650						
Insertion loss (dB)	Max	4.1	7.5	10.7	13.9	17.2	20.6	
Loss uniformity (dB)	Max	0.5	0.6	0.8	1	1.5	2	
Return Loss (dB)		≥50	≥50	≥50	≥50	≥50	≥50	
Polarization Dependent Loss (dB)	Max	0.2	0.2	0.3	0.3	0.3	0.4	
Directivity (dB)		≥55	≥55	≥55	≥55	≥55	≥55	
Fiber Type		Corning smf-28e or customer designation						
Wavelength Dependent Loss (dB)	Max	0.6	0.6	0.6	0.8	0.8	0.8	
Temperature correlation loss-40~85°C (dB)	Typical value	0.3	0.3	0.3	0.4	0.4	0.4	
	Max	0.5	0.5	0.5	0.5	0.5	0.5	
Working Temperature (°C)		-40~85°C						



Storage Temperature (°C)

-40~85°C