


## FTTH-006 Optical Fiber Panel Specification

The FTTH-006 is a desk mounted or wall mounted termination box for end user, indoor use, capable to handle fiber fusion, fiber cables and pigtailed.

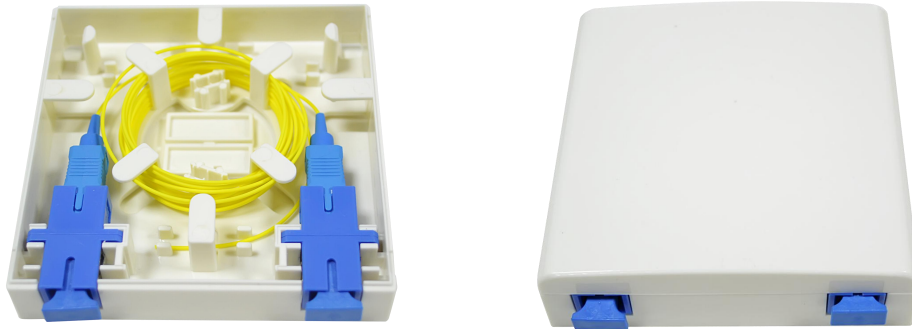

### .Features & Benefits

- 1.Support termination, splicing and storage for fiber optic cable systems.
- 2.Compact structure and perfect fiber management.
- 3.Engineered fiber routing protect bend radius through the unit to ensure signal integrity.
- 4.Applicable for desk-mount or wall-mounted and compatible with flush-mount outlet.
- 5.Working Temperature: -25°C~+60°C; Atmospheric
- 6.Pressure: 70kPa~106kPa;
- 7.Relative Humidity:  $\leq 85\%$  (+30°C) ;
- 8.Connector Repeatability: >1000;
9. Connector Specification: IL:  $\leq 0.2\text{dB}$ ; RL:  $\geq 50\text{dB}$ ;

### .Specifications

Parameter	Value	Remark
Model	FTTH-006	
Outside Dimension (mm)	86*86*25	
Material	ABS	
Color	White	
Storage of fibers	G.657	
Splice capacity	2fiber	
Splice Method	Fusion Splice	45mm sleeve
Adapter type and count	2 SC/SX or 2 LC/DX	
Input cable	3mm or figure 8 (2*3mm)	From side or bottom

### .Accessories

No.	Name	Qty.
1	Fiber splice protection sleeve	2pcs
2	Expansion bolts for the outlet wall-mounted	2 set

